

Monitor for continuous measurement of pH and redox (ORP) potential in pool water.

Monitor AMI pH/mV:pH/mV Pool

Complete system mounted on PVC panel:


- Dual channel **transmitter AMI pH/mV : pH/mV** in a rugged aluminum enclosure (IP 66).
- Flow cell for pool water applications with digital sample flow indicator and a NT5K temperature sensor.
- Factory tested, ready for installation and operation.

For use with:

- Swansensor pH Standard and Redox Standard.

Specifications:

- Measuring ranges: 1 to 13 pH
respectively -400 to +1200 mV
- Simultaneous measurement of pH and redox (ORP) potential with maintenance-free combination electrodes, sample temperature and sample flow check.
- Big backlit LC display for the reading of measuring value, sample temperature, sample flow and operating status.
- Easy user menus with simple programming of all parameters by keypad.
- Two current outputs (0/4 - 20 mA) for measured signals (3rd output optional).

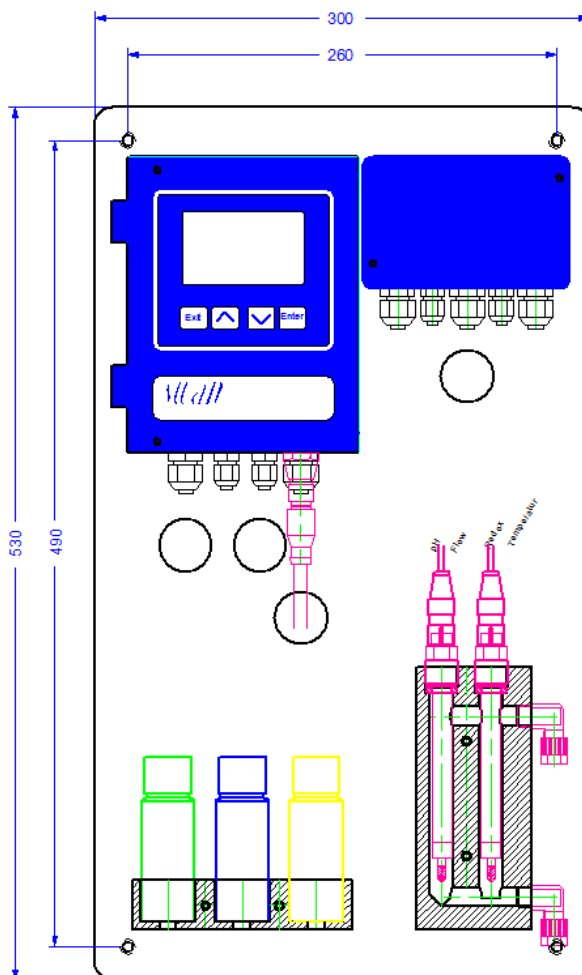

Order Nr.	Monitor AMI pH/mV : pH/mV Pool AC	A-21.311.010
	Monitor AMI pH/mV : pH/mV Pool DC	A-21.312.010
Option:	[] 3 rd current signal output (0/4 – 20mA)	A-81.420.050
	[] Profibus DP & Modbus RTU interface (RS-485)	A-81.420.020
	[] USB interface	A-81.420.042
	[] HART interface	A-81.420.060
Option:	[] Swansensor pH Standard	A-87.120.200
Option:	[] Swansensor ORP Standard	A-87.420.200

pH/ORP Measurement

Signal input galvanically separated
Input resistance: $> 10^{13} \Omega$

pH measurement

Measuring range with: pH 1 to 13
Resolution: 0.01 pH
Reference temperature: 25 °C
Automatic temperature compensation according to Nernst.

ORP measurement

Measuring range with: -400 bis 1200 mV
Resolution: 1 mV

Calibration solutions table

Programmable table for pH buffers and ORP calibration solution.

Temperature measurement

Measuring range: -30 to +130 °C
Resolution: 0.1 °C

Transmitter Specifications and Functionality

Electronics case: Cast aluminum
Protection degree: IP 66 / NEMA 4X
Display: backlit LCD, 75 x 45 mm
Electrical connectors: screw clamps
Dimensions: 180 x 140 x 70 mm
Weight: 1.5 kg
Ambient temperature: -10 to +50 °C
Humidity: 10 - 90% rel., non condensing

Power supply

Voltage:
AC version: 100 - 240 VAC ($\pm 10\%$),
50/60 Hz ($\pm 5\%$)
DC version: 10-36 VDC
Power consumption: max. 35 VA

Operation

Easy operation based on separate menus for "Messages", "Diagnostics", "Maintenance", "Operation" and "Installation".

User menus in English, German, French and Spanish.

Separate menu specific password protection.

Display of process value, sample flow, alarm status and time during operation.
Storage of event log, alarm log and calibration history.

Storage of the last 1'500 data records in logger with selectable time interval.


Safety features

No data loss after power failure, all data is saved in non-volatile memory.

Overvoltage protection of in- and outputs.

Galvanic separation of measuring inputs and signal outputs.

Electrical Connection Scheme

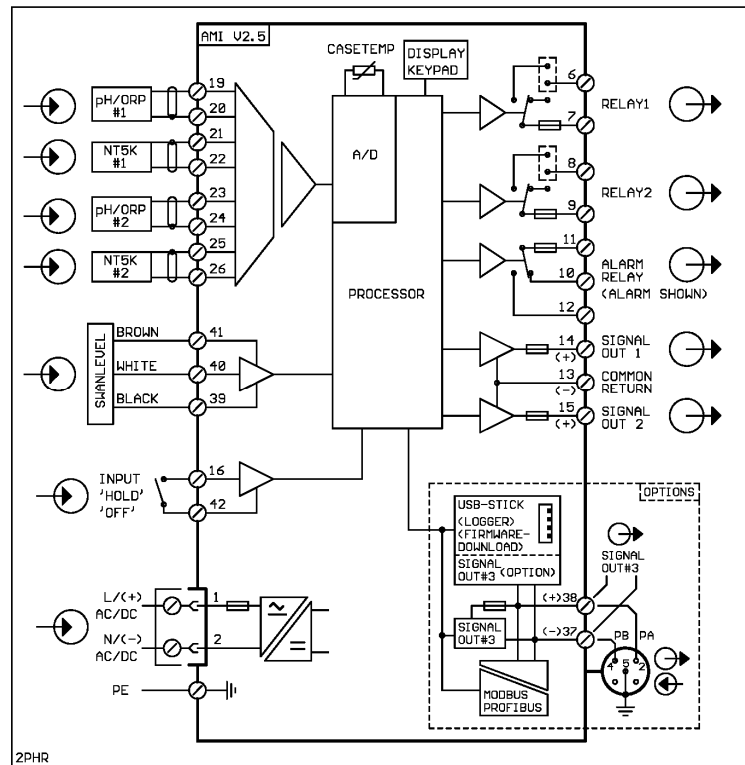

Transmitter temperature monitoring with programmable high/low alarm limits.

1 Alarm relay

One potential free contact for summary alarm indication for programmable alarm values and instrument faults.
Maximum load: 1A / 250 VAC

1 Input

One input for potential-free contact.
Programmable hold or remote off function.

2 Relay outputs

Two potential-free contacts programmable as limit switches for measuring values, controllers or timer for system cleaning with automatic hold function.
Rated load: 1A / 250 VAC

2 Signal outputs (3rd as option)

Two programmable signal outputs for measured values (freely scaleable, linear or bilinear) or as continuous control output (control parameters programmable) as current source. 3rd signal output selectable as current source or current sink.

Current loop: 0/4 - 20 mA
Maximum burden: 510 Ω

Control functions

Relays or current outputs programmable for 1 or 2 pulse dosing pumps, solenoid valves or for one motor valve. Programmable P, PI, PID or PD control parameters.

1 Communication interface (option)

- RS485 interface (galvanically separated) with Fieldbus protocol Modbus RTU or Profibus DP
- 3rd Signal output
- USB interface
- HART interface

Monitor Data

Sample conditions

Flow rate: min. 30 l/h
Temperature: up to 50 °C
Inlet-, Outlet pressure: 0.2 to 2 bar

Flow cell and connections

Flow cell made of acrylic glass.
Sample in-, outlet: Tube 6x8 mm, PE

Panel

Dimensions: 300 x 530 x 150 mm
Material: white PVC
Total weight: 5.0 kg