

Flow cell B-Flow L70

Data sheet no. DenA83228123

Flow cell for continuous conductivity measurement in ultrapure water at high pressure.

Features

- For installation of one sensor with NPT 3/4" thread, e.g. Swansensor UP-CON1000-NPT.
- Sensor dimensions: 1/2" diameter, max. 40 mm length.
- Flow cell made of stainless steel 1.4404 (SS316L).

Scope of delivery



- Flow cell B-Flow L70.
- Mounting parts (M5 screws, washers, nuts and distance sleeves).

Sample conditions

Sample temperature: -10 to 100 °C
Operating pressure: max. 50 bar

Process connections

2x female thread G 1/8" (ISO 228-1)
(Swagelok fittings must be ordered separately)

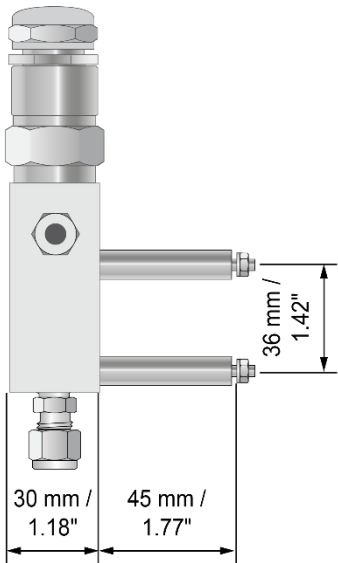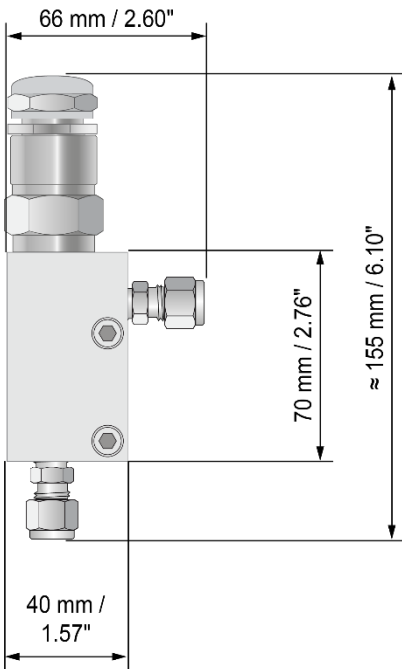

Order numbers: Flow cell B-Flow L70		A-83.228.123
Accessories	For all accessories and details, please visit our website at www.swan.ch . Swansensor UP-CON1000 NPT Swagelok tube fitting, male thread R 1/8" (ISO 7-1) to 1/4" tube OD (SS-400-1 2RT)	A-87.334.1X0 C-86.530.060

