

Flow cell B-Flow L130

Data sheet no. DenA83228133

Flow cell for continuous conductivity measurement in ultrapure water at high pressure.

Features

- For installation of one sensor with NPT 3/4" thread, e.g. Swansensor RC U.
- Sensor dimensions: 1/2" diameter, max. 89 mm length.
- Flow cell made of stainless steel 1.4404 (SS316L).

Scope of delivery


- Flow cell B-Flow L130.
- Mounting parts (M5 screws, washers, nuts and distance sleeves).

Sample conditions

Sample temperature: -10 to 100 °C
Operating pressure: max. 50 bar

Process connections

2x female thread G 1/8" (ISO 228-1)
(Swagelok fittings must be ordered separately)

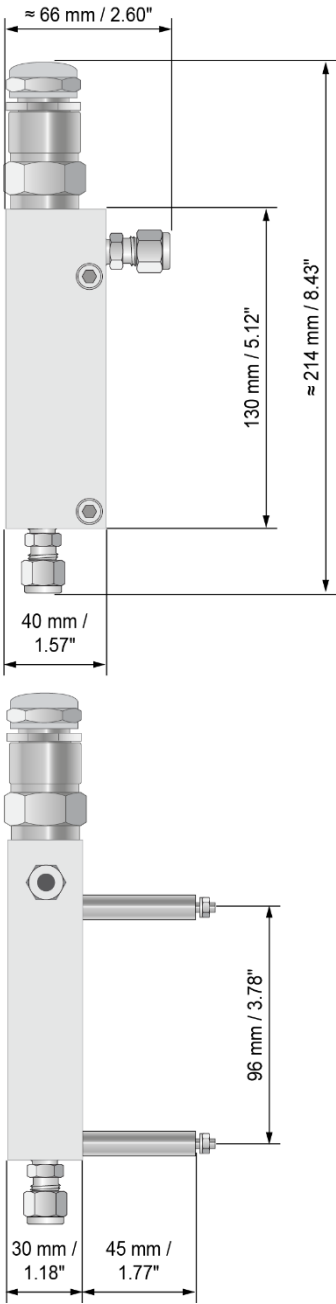

Order numbers: Flow cell B-Flow L130		A-83.228.133
Accessories	For all accessories and details, please visit our website at www.swan.ch . Swansensor RC U Swagelok tube fitting, male thread R 1/8" (ISO 7-1) to 1/4" tube OD (SS-400-1 2RT)	A-87.322.2X0 C-86.530.060

